


SIMPLIFYING COMPLEXITY

EX-TS-400-10

Entry level 1080p HDMI Extender



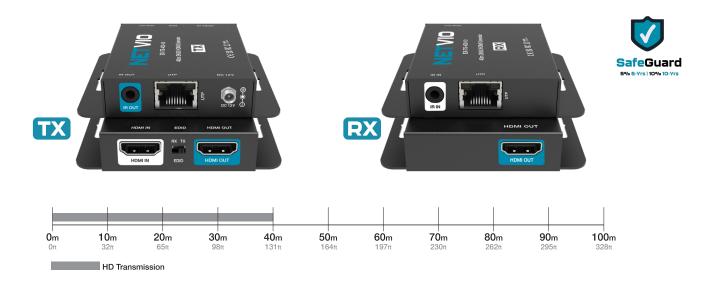

Sometimes you just need to move good quality video from A & B. The TS-400 is a value extender that fits that need, moving 1080p video up to 40m using standard Cat5e/6 cabling.



The TS-400 offers installer convenience features including Power-Over-Cable (PoC).
Simply power the transmitter and


Simply power the transmitter and install the receiver behind the display – no power required.



The IR feature allows control of a centralized media source up to 40m using cat5e/6 cabling.

All IR accessories included.

BASIC WIRING DIAGRAM

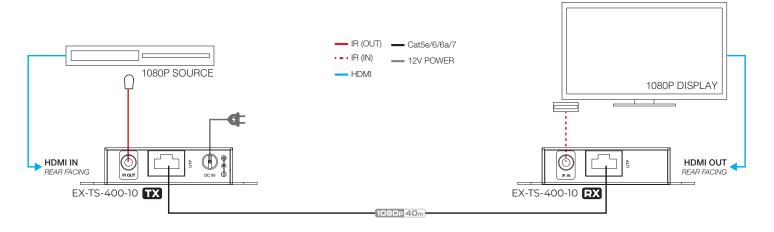



VIDEO

Encoding Data Rate

Over Cat5e/6: Max 10.2Gbs

Max Video Transmission

1080p. 2K/60 8b 4:4:4

Max Pixel Clock

165MHz / 165Mcsc

HDR Compatibility

Not supported

HDCP

Inclusive up to 1.4

AUDIO

Audio Formats

LPCM 2ch, LPCM 5.1, LPCM 7.1, Dolby Digital, Dolby Digital Plus, Dolby TrueHD, DTS, DTS Master

COMMUNICATION & CONTROL

IR:

1-way, RX > TX via 3.5mm jack sockets. (see wiring schematic)

EDID:

Selectable | Remote display or local (TX) connection.

ENVIRONMENT

STORAGE:

-20°C - 60°C | 20% - 90% RH

OPERATING:

-20°C - 60°C | 20% - 90% RH

OTHER INFORMATION

Power Supply:

12v external PSU supporting power-over-cable (PoC). PSU connection to either TX.

Weights & Dimensions (per device):

Height: 17m Width: 68mm Depth: 58mm Weight: 130g

In the box:

Mounting brackets IR Accessories

12v PSU

Safety Approvals: CE, UKCA, FCC, RoSH

Warranty

Regulations

2-Year standard warranty 3-Year standard warranty (*subject to online registration*) 5-Year SafeGuard | 5% product value 10-Year SafeGuard | 10% product value